


Plate Lacing

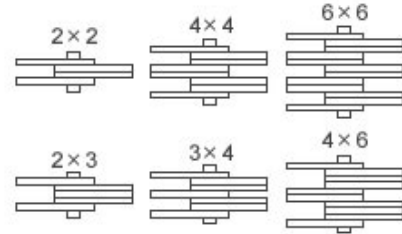

Chain	Pitch	Plate Lacing	Pin		Plate		Avg. Tensile strength	Max Allowable Load	App.kg/m
			Dia (d2)	L	h2	T			
BL422	12.7	2x2	5.09	10.70	12.07	2.08	27.6	4.45	0.62
BL423		2x3		12.80			27.6	4.45	0.76
BL434		3x4		16.80			41.4	6.68	1.10
BL444		4x4		19.20			56.0	8.91	1.20
BL446		4x6		23.00			56.0	8.91	1.48
BL466		6x6		27.10			81.7	13.36	1.78
BL522	15.88	2x2	5.96	12.50	15.09	2.44	42.8	6.19	0.91
BL523		2x3		14.90			42.8	6.19	1.13
BL534		3x4		20.20			63.6	9.28	1.57
BL544		4x4		22.40			84.5	12.37	1.81
BL546		4x6		27.40			84.5	12.37	2.21
BL566		6x6		32.10			125.1	18.56	2.65
BL622	19.05	2x2	7.94	17.37	18.11	3.30	63.6	9.59	1.45
BL623		2x3		20.73			63.6	9.59	1.80
BL634		3x4		27.43			102.6	14.38	2.50
BL644		4x4		30.78			122.3	19.17	2.85
BL646		4x6		37.49			122.3	19.17	3.52
BL666		6x6		44.20			190.8	28.76	4.30
BL822	25.40	2x2	9.54	21.34	24.13	4.09	108.2	14.63	2.39
BL823		2x3		25.48			108.2	14.63	2.99
BL834		3x4		33.76			143.6	21.94	4.13
BL844		4x4		37.90			214.6	29.25	4.73
BL846		4x6		46.18			214.6	29.25	5.88
BL866		6x6		54.46			324.6	43.88	7.03
BL1023	31.75	2x3	11.11	30.33	30.18	4.9	146.8	25.9	4.30
BL1034		3x4		40.23			231.6	31.3	6.00
BL1046		4x6		55.09			291.4	36.2	8.60
BL1223	38.1	2x3	12.71	35.43	36.2	5.77	192.0	36.7	5.80
BL1234		3x4		47.07			308.1	44.1	8.10
BL1246		4x6		64.52			381.1	50.5	11.60
BL1423	44.45	2x3	14.28	38.50	42.2	6.4	225.7	49.0	8.15
BL1434		3x4		52.00			372.6	58.8	11.34
BL1446		4x6		71.00			451.2	67.6	16.09
BL1623	50.8	2x3	17.45	44.50	48.2	7.2	341.1	58.8	10.51
BL1634		3x4		59.50			519.6	70.6	14.61
BL1646		4x6		82.00			680.4	80.4	20.76